


Plastic Belt Conveyor Model 107

SPECIFICATIONS

Effective Widths:	Non-Flighted (straight run); 4" to 30" in 1" increments Flighted; 4" to 24" in 1" increments
Live Loads:	150 lbs. @ 45° incline 400 lbs. @ horizontal 20 lbs./ft of length (maximum)
Frame:	Formed 12 ga.
Lengths:	3 ft. to 25 ft. in 1 ft. increments
Drives:	1/4 HP @ 20 FPM 1/2 HP @ 40 FPM 3/4 HP @ 65 FPM 1 HP @ 107 FPM Other speeds available on request
Belt Types:	Flat Top, Flush Grid, Mesh Top, Perforated Flat Top, Diamond Friction Top, Square Friction Top
Accessories:	900 Series: Flights & Side Guards

Typical Cross Section

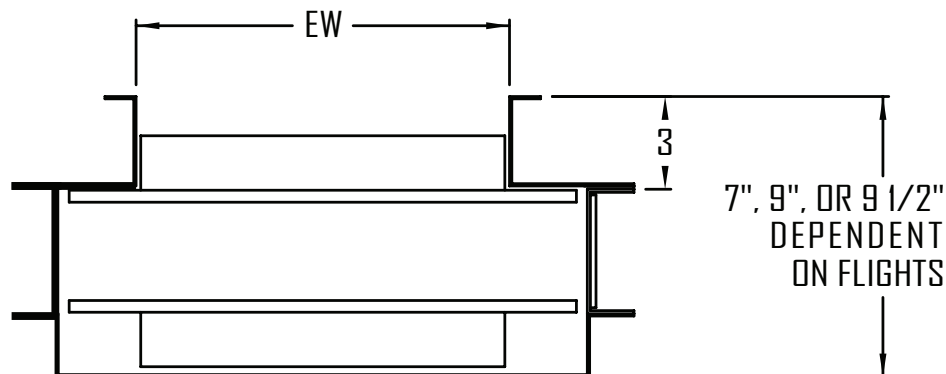

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor
design.*

