

SYSTEMS ACCESSORIES


POWER ROTATED TURNTABLE

The turntable is used to rotate products up to 180°. The turntable is powered by a chain drive that is located underneath the table top. It has proximity switches mounted on the base to sense position and control rotation of product. Turntable speed is approximately 3 revolutions per minute. A chain cable carrier keeps wires neat and out of the way. Any chain roller conveyor such as; 25-CRR, 26-CRR, 36-CRR, can sit on the table top. Due to sprocket sizes, only the 26-CRR or the 36-CRR is available with powered transition rollers; the others are only available with gravity transition rollers.




OAL	OAW	BR	CS	WEIGHT
Available in 44" - 4" Roller Centers 48" - 4" or 6" Roller Centers 52" - 4" Roller Centers 54" - 6" Roller Centers 60" - 4" or 6" Roller Centers Only	52 1/4"	49"	45 3/4"	2462
	54 1/4"	51"	47 3/4"	2580
	56 1/4"	53"	49 3/4"	2690
	58 1/4"	55"	51 3/4"	2816
	60 1/4"	57"	53 3/4"	2934
	62 1/4"	59"	55 3/4"	3052
	64 1/4"	61"	57 3/4"	3170
	66 1/4"	63"	59 3/4"	3288
	68 1/4"	65"	61 3/4"	3406
	70 1/4"	67"	63 3/4"	3524

All weights in catalog are conveyor weights only. Accessories, crating, etc. are not included
 *Also available with 199-CRR with maximum capacity of 1500 lbs. - Contact Factory.

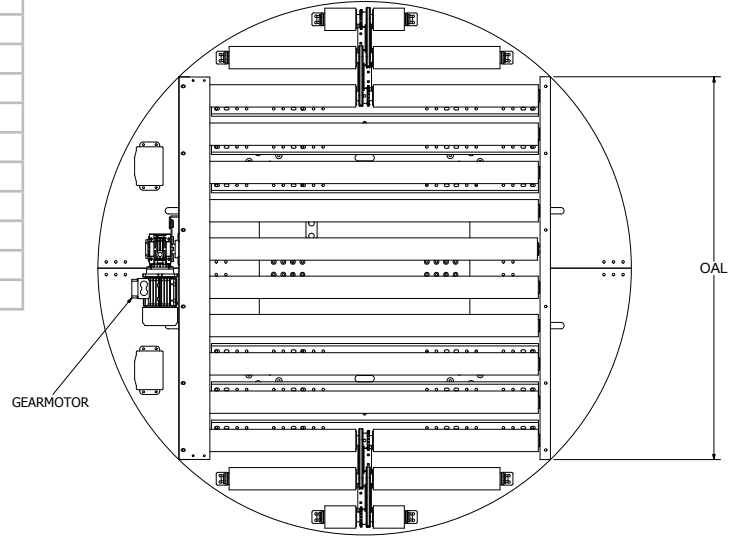

MDPT - Maximum Capacity - 3000 lbs

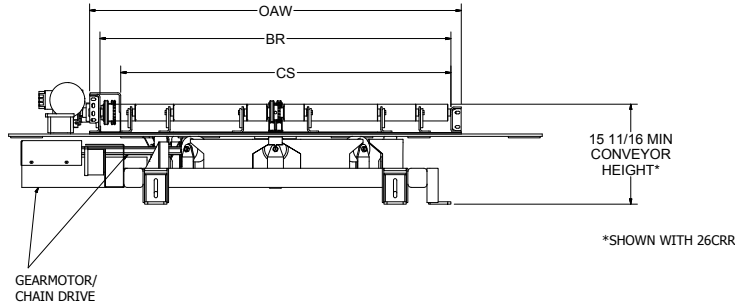

HDPT - Maximum capacity - 6000 lbs

